



DESCRIPTION

Applicable to the fiber termination point in the fiber access network. The function of wiring and splicing realize flexible wiring and storage of fiber cable core. Specially designed for optical fiber communication room. Suitable for standard 19" cabinet.

APPLICATION

- Produce by cold-rolled steel, and surface electrostatic spray make it beautiful and easy to use.
- Splicing capacity: 3U fiber optical shelf loads max.288 cores.
- Full equipped LC adapter and fiber splice tray.

Ningbo Doppler Communication Co., Ltd.

No.86 Fengyi Road, Economic Development Zone, Yuyao Zhejiang 315400

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice


High density Fiber Optical Patch Panel



Product No: LFPM03-288 Ver. 02/18

Product Specification.

PRODUCT DIMENSION

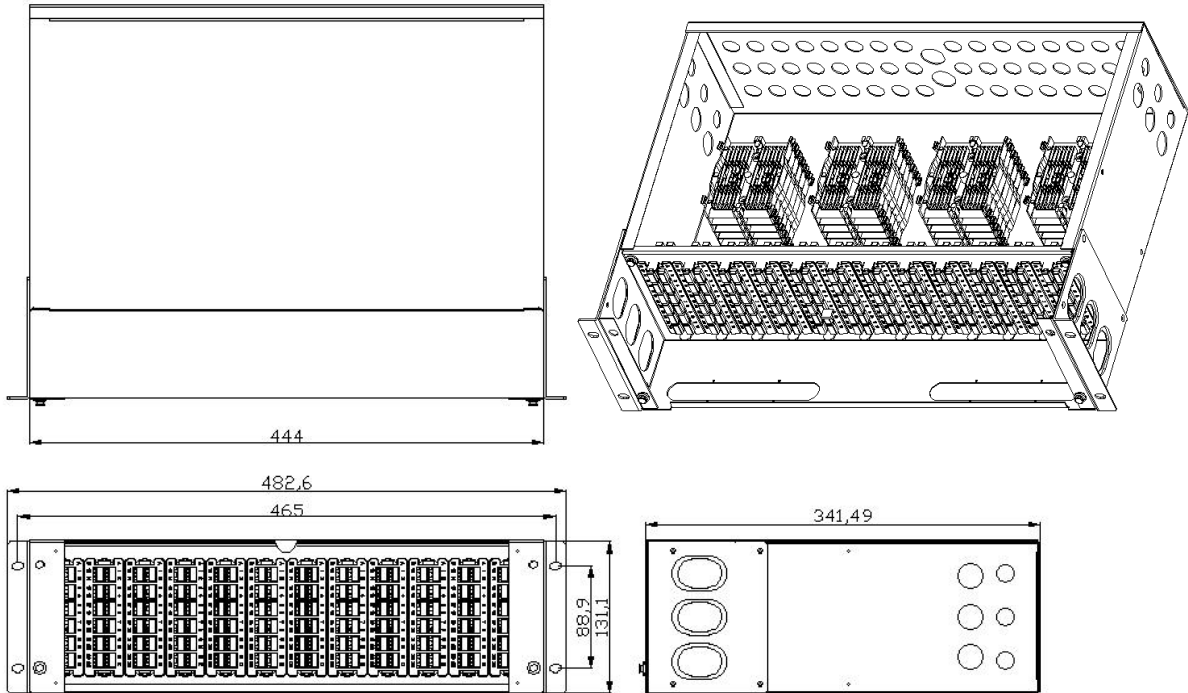

ORDER INFORMATION

Part No.	Description	Color	Carton	Carton measurement (L*W*H)
LFPM03-288	High density Fiber optical patch panel(3U)	Black	1PCS	51cm×42cm × 18cm

Ningbo Doppler Communication Co., Ltd.

No.86 Fengyi Road, Economic Development Zone, Yuyao Zhejiang 315400

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice