

DESCRIPTION

CAT5E keystone jack surpassed all CAT5E performance requirements, comply with Fast Ethernet application system, suitable for connection between FD to the outlet of the work area, providing up to 250MHz available bandwidth.

APPLICATION


- Meet the requirements of both T568A/T568B with clear color labels.
- Overall zinc alloy shielding design meets the industry standards
- Compact jack design, 8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 15 μ " , 30 μ " or 50 μ " gold plate can be selected
- Accept 23-24AWG cable
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- With backward compatibility of CAT5 and lower classes

Ningbo Doppler Communication Co., Ltd.

No. 19, 3rd Binhai Road, Hangzhou Bay New Zone, Ningbo City, Zhejiang Province, CHINA.

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice

PRODUCT DIMENSION

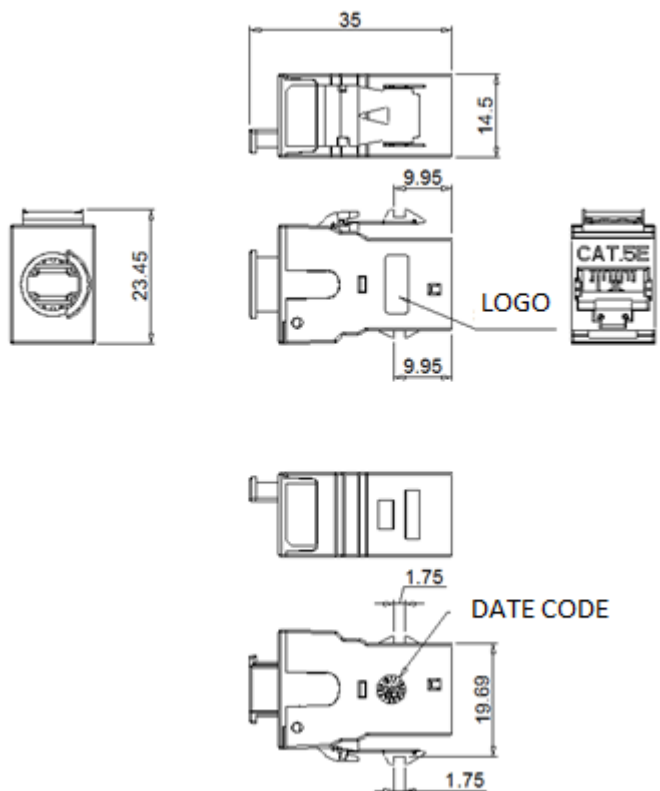

CONSTRUCTION


<i>Description</i>	<i>Parameter</i>
Contact resistance(max)	20mΩ
Insulation resistance(min)	500MΩ
Return loss(dB)	9.5dB

Ningbo Doppler Communication Co., Ltd.

No. 19, 3rd Binhai Road, Hangzhou Bay New Zone, Ningbo City, Zhejiang Province, CHINA.

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice

PERFORMANCE

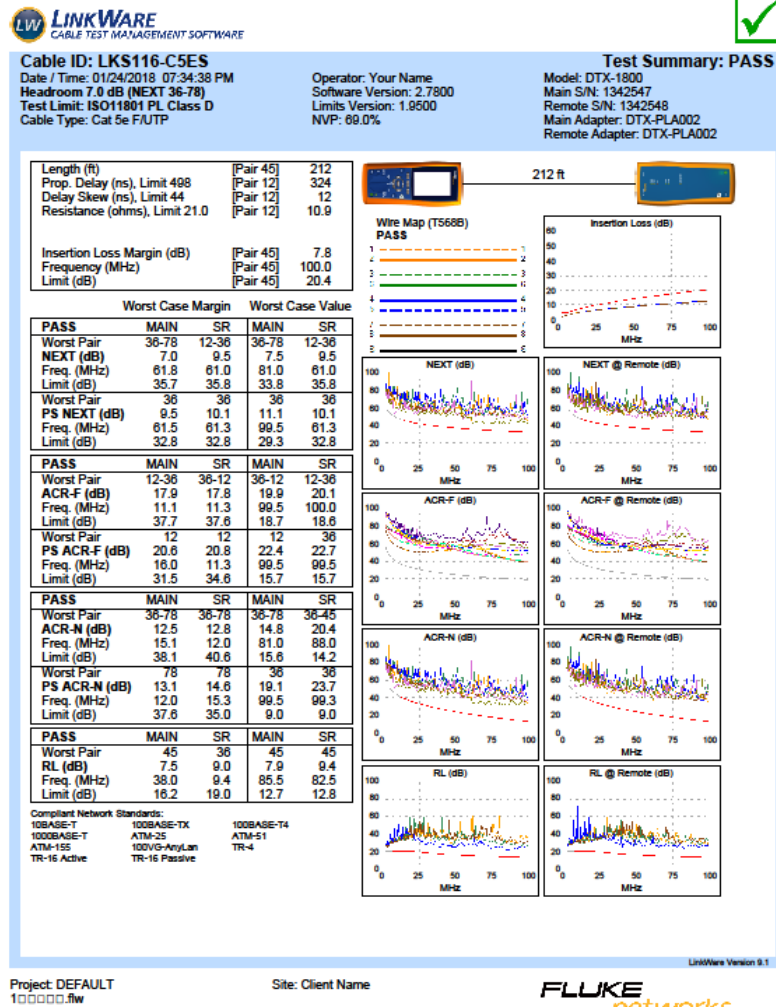

ORDER INFORMATION

Part No.	Description	Color	Inner Box	Carton	Carton measurement (L*W*H)	Weight
LKS116-C5ES	Cat5E shielded keystone jacks (180 degree)	Silver	25PCS	250PCS	53cm x 31cm x 23cm	9.20KG

Ningbo Doppler Communication Co., Ltd.

No. 19, 3rd Binhai Road, Hangzhou Bay New Zone, Ningbo City, Zhejiang Province, CHINA.

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice