

DESCRIPTION

CAT6 keystone jack surpassed all CAT6 performance requirements, comply with Gigabit Ethernet application system, suitable for connection between FD to the outlet of the work area, providing up to 350Mhz available bandwidth.

APPLICATION


- Available in Cat6, T568A/B wiring, meet or exceed TIA/EIA Cat6 requirements
- Overall zinc alloy shielding design meets the industry standards
- Compact jack design, 8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 15 μ " , 30 μ " or 50 μ " gold plate can be selected
- Accept 23-24 AWG cable
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- With backward compatibility of CAT 6 and lower classes

Ningbo Doppler Communication Co ., Ltd.

No. 19, 3rd Binhai Road, Hangzhou Bay New Zone, Ningbo City, Zhejiang Province, CHINA.

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice

PRODUCT DIMENSION

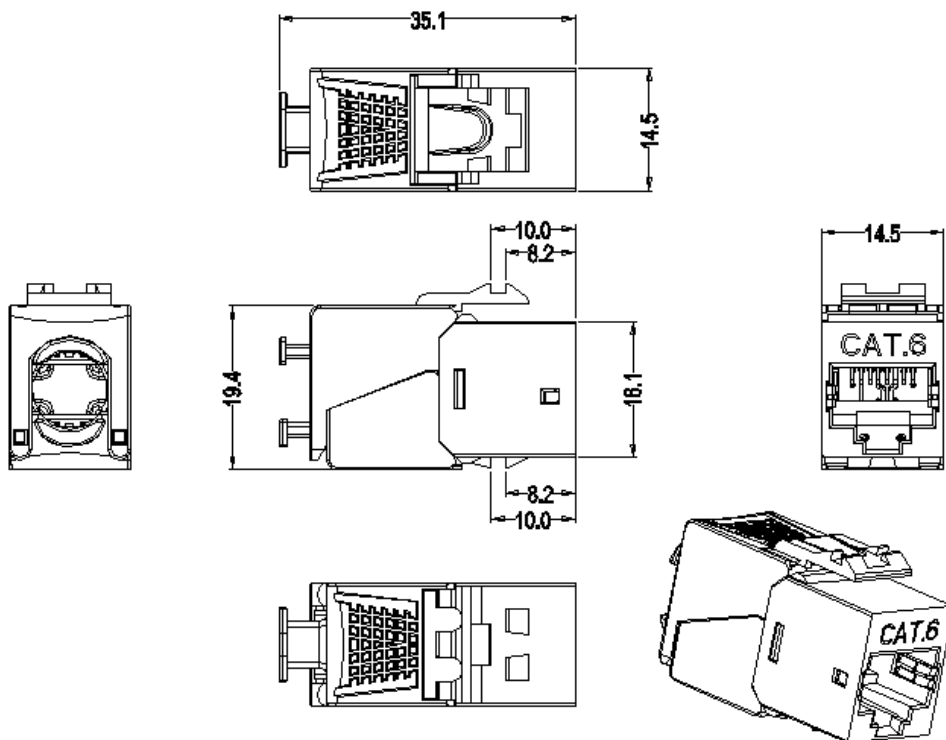

CONSTRUCTION


<i>Description</i>	<i>Parameter</i>
Contact resistance(max)	20mΩ
Insulation resistance(min)	500MΩ
Return loss(dB)	5.9dB

Ningbo Doppler Communication Co., Ltd.

No. 19, 3rd Binhai Road, Hangzhou Bay New Zone, Ningbo City, Zhejiang Province, CHINA.

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice

PERFORMANCE

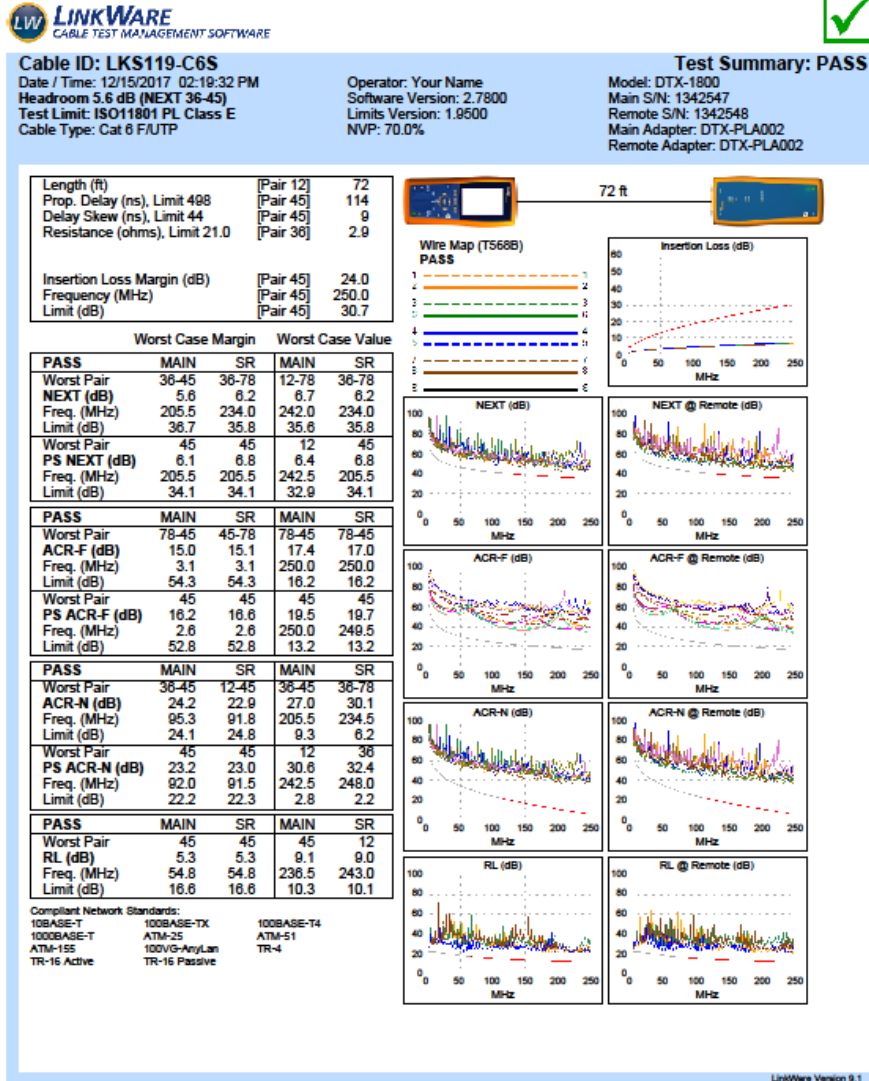

ORDER INFORMATION

Part No.	Description	Color	Inner Box	Carton	Carton measurement (L*W*H)	Weight
LKS119-C6S	Cat6 shielded keystone jacks (180 degree)	Silver	25PCS	250PCS	53cm x 31cm x 23cm	10.00KG

Ningbo Doppler Communication Co., Ltd.

No. 19, 3rd Binhai Road, Hangzhou Bay New Zone, Ningbo City, Zhejiang Province, CHINA.

Ningbo Doppler Communication Co. Ltd. reserves the right to change specifications without prior notice