

Product No: LPA124-C6S Ver. 04/23 Product Specification.



DESCRIPTION

CAT6 FTP 24 port patch panel, modular tool free type, surpassed all CAT6 performance requirements, comply with Gigabit Ethernet application system, providing up to 250MHz available bandwidth, suitable for horizontal cabling, network equipment and consolidation point.


APPLICATION

- Unique exterior design, simple, compact and beautiful
- High strength die-cast zinc alloy shield case shielding meet industry standards
- Comply with ergonomic principle and with termination-free design
- Solid and corrosion phosphor bronze IDC enables over 250 terminations
- With backward compatibility of CAT 6 and lower classes
- Easy installation, low cost, easy operation
- Be compatible with 19-inch cabinets
- Phosphor bronze contact with15μ,30μ,50μ gold plate can choose , durability is over 1000 matching recycles



Product No: LPA124-C6S Ver. 04/23 Product Specification.

PRODUCT DIMENSION

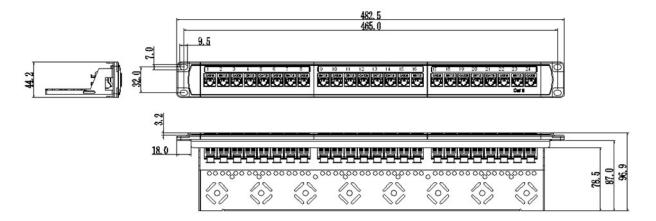


CONSTRUCTION

Description	Parameter		
Contact resistance(max)	20mΩ		
Insulation resistance(min)	500ΜΩ		
Return loss(dB)	5.8dB		





Product No: LPA124-C6S Ver. 04/23 Product Specification.


PRODUCT PERFORMANCE




Length (m), Limit 90.0	[Pair 78]	76.5
Prop. Delay (ns), Limit 498	[Pair 36]	376
Delay Skew (ns), Limit 44	[Pair 36]	6
Resistance (ohms)		N/A
Insertion Loss Margin (dB)	[Pair 36]	4.3
Frequency (MHz)	[Pair 36]	100.0
Limit (dB)	[Pair 36]	21.0







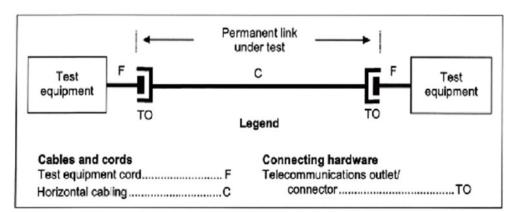

ORDER INFORMATION

Part No.	Decription	Color	Inner Box	Carton	Carton measurement (L*W*H)	Weight
LPA124-	CAT6 FTP 24-port patch	Black	1PCS	10PCS	53cm× 31cm × 23cm	17.00KG
C6S	panel					

Ningbo Doppler Communication Co., Ltd.

NO.19, BINHAISAN ROAD, HANGZHOU BAY NEW ZONE, NINGBO, ZHEJIANG PROVINCE, CHINA.315336